
TEXAS INSTRUMENTS BLACK CASSETTE RIBBON


BLACK CASSETTE RIBBON TO FIT INSIDE YOUR TEXAS INSTRUMENTS PRINTER 80



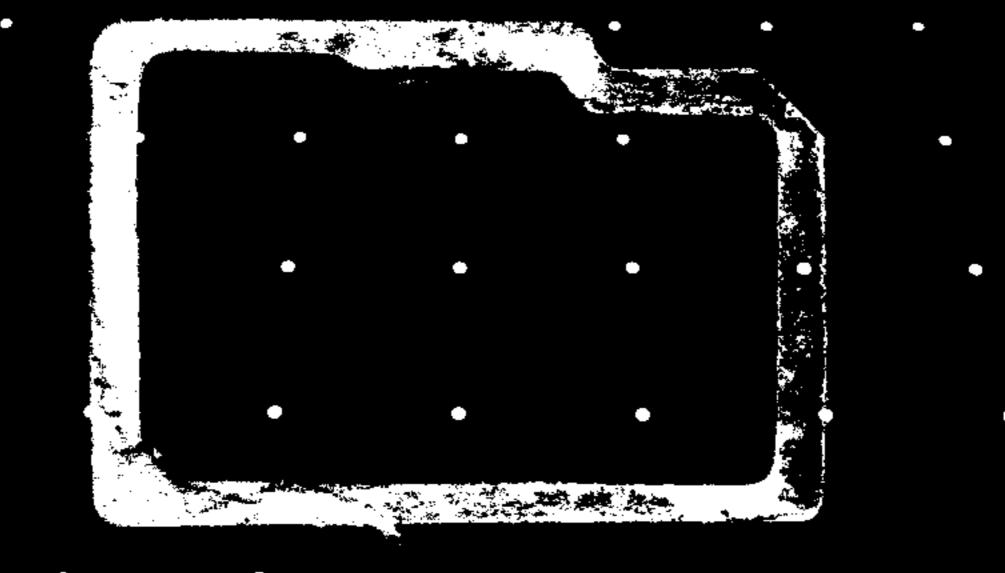

FOR USE WITH THE TEXAS INSTRUMENTS HEX-BUS™ PRINTER 80 Inserting A Cassette Ribbon:

- 1. Turn off the Printer (unless a file is currently open for the Printer).
- 2. Release the cassette ribbon as indicated.
- 3. Remove the used cassette ribbon.
- 4. Remove the green tab on the new cassette ribbon.
- 5. Insert the new cassette as indicated.
- 6. Turn the wheel on the cassette in a counterclockwise direction to tighten the ribbon.
- 7. Return the release lever to its original position.

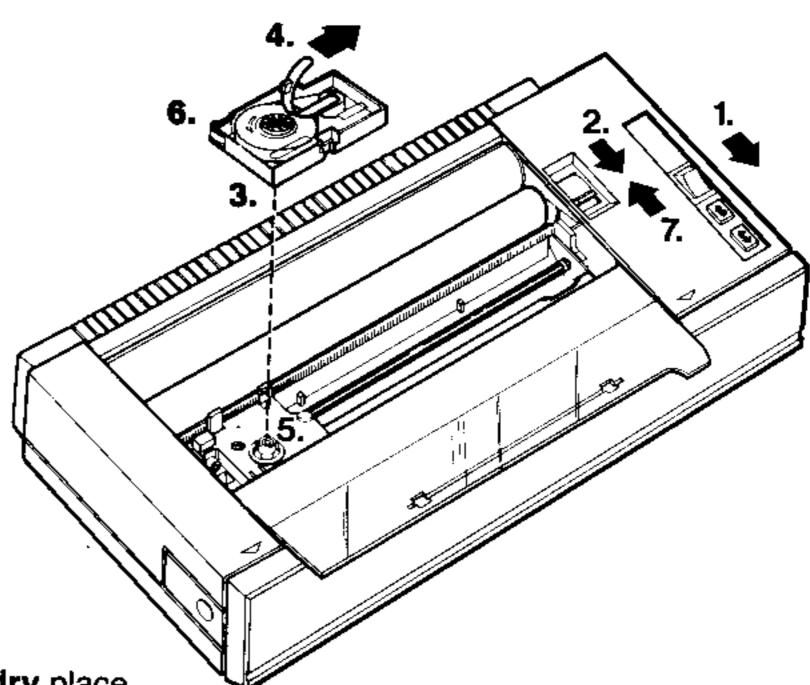

WARNING: Store the cassette ribbon in a cool, dry place.

Storage above +60°C will damage ribbon.

CAUTION

The electronic components of the computer and peripherals can be damaged by discharges of static electricity. To remove static, touch a metal object such as a doorknob or desk lamp before handling the devices. Avoid touching the connector contacts.



TEXAS INSTRUMENTS
INCORPORATED
Dellas Texas

Assembled in Japan. Copyright © 1983, Texas Instruments incorporated.